

1

HOOTRONIC HAB105RTH

Sounder unit HAB105N
 Maximum output: 112 dB(A) @ 1 m
 3 Stage alarm options
 5 hootronic alarm tones
 Rotating Beacon
 G6,35/GY6,35 Halogen Bulb
 IP Rating: IP65
 Temp: -25°C to +50°C
 Unit weight: 1.15kg DC 1.4kg AC
 CE

Dimensions : 130mm(w) x 250mm(h)
 1.5mm² terminals

For Lens colour options
 x = in order code to be replaced with
 required lens colour

R = Red A = Amber
 B = Blue C = Clear
 G = Green Y = Yellow

y = in order code to be replaced with
 required housing colour

G = Grey R = Red

Order code Nominal voltage & range

HAB105RTHDC24y/x 24VDC (18-30VDC)
 Beacon 910mA Sounder 185mA @24VDC

HAB105RTHAC115y/x 115VAC (103-127VAC)
 Beacon 216mA Sounder 50mA @ 115VAC

















HAB105RTHAC230y/x 230VAC (207-253VAC)
 Beacon 117mA Sounder 25mA @ 230VAC

Example:- HAB105RTHDC24G/R
 This example is for a
 HA105N Hootronic sounder with rotating beacon
 running on 24VDC
 the housing is grey with a red lens.

Bulb replacement
 E2S Part No. Version
 BJC20W24VCL 24V 20W
 BJCD25W120VCL 115V 25W
 BJCD25W230VCL 230V 25W

2

HAB105RTH Sounder Tone Settings Table

Stage 1 Tone	Alarm Description	Stage 2 (S2)	Stage 3 (S3)	Header 
1	Industrial Hooter	Tone 3	Tone 5	1  2  3 
2	High Frequency Mechanical Siren	Tone 1	Tone 5	1  2  3 
3	Medium Frequency Mechanical Siren	Tone 1	Tone 5	1  2  3 
4	Electro-mechanical Buzzer	Tone 1	Tone 5	1  2  3 
5	Mechanical Bell	Tone 1	Tone 2	1  2  3 



ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.







ATTENTION: Disconnect from power source before installation or service to prevent electric shock.



ATTENTION: Lens on unit will be hot allow to cool prior to removal.

A HOOTRONIC HAB105RTH

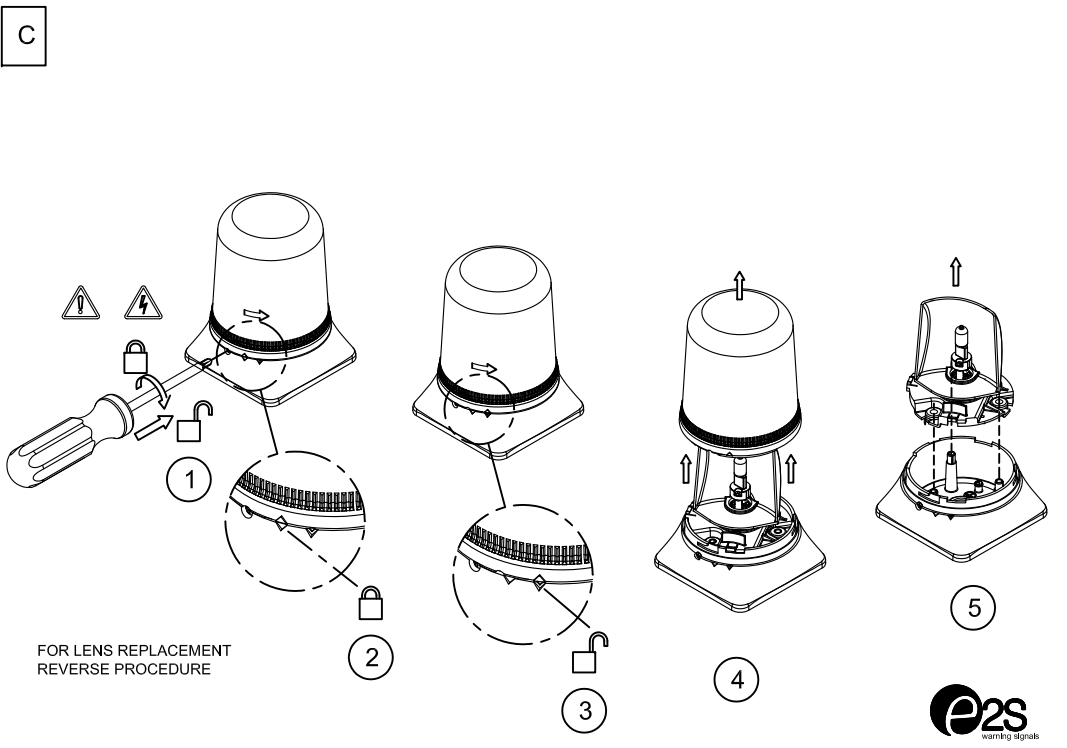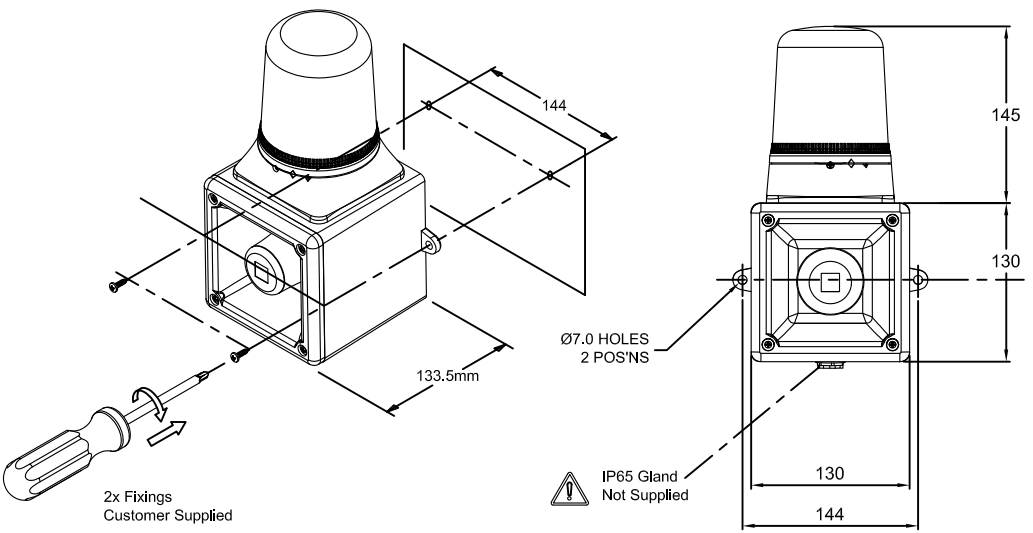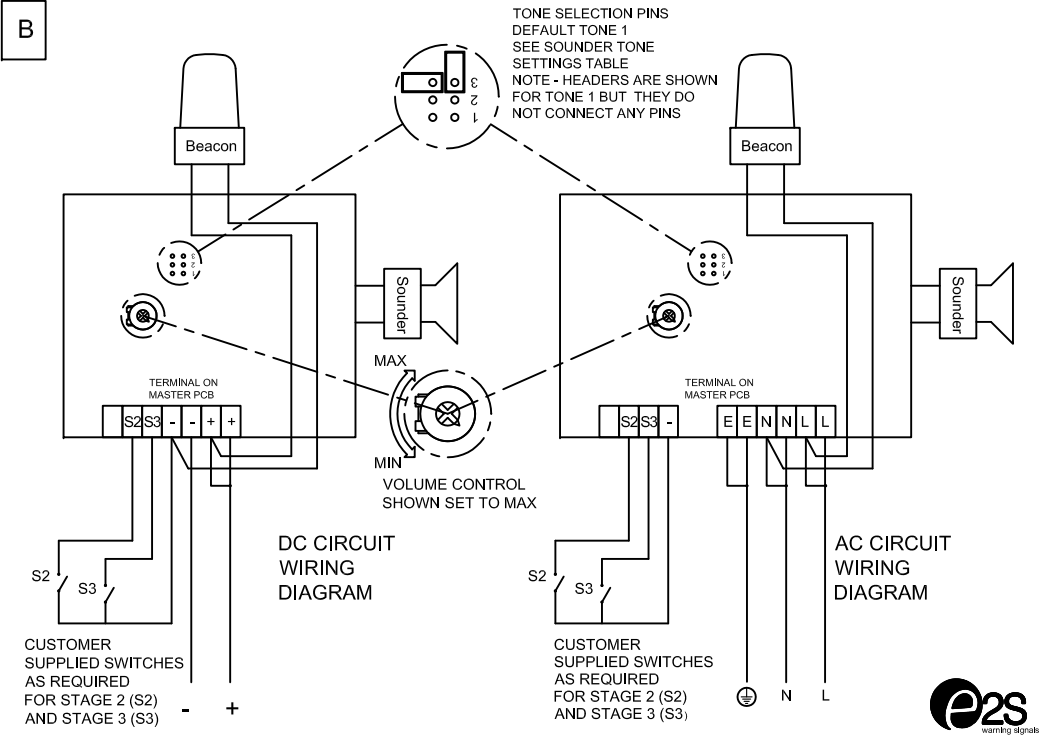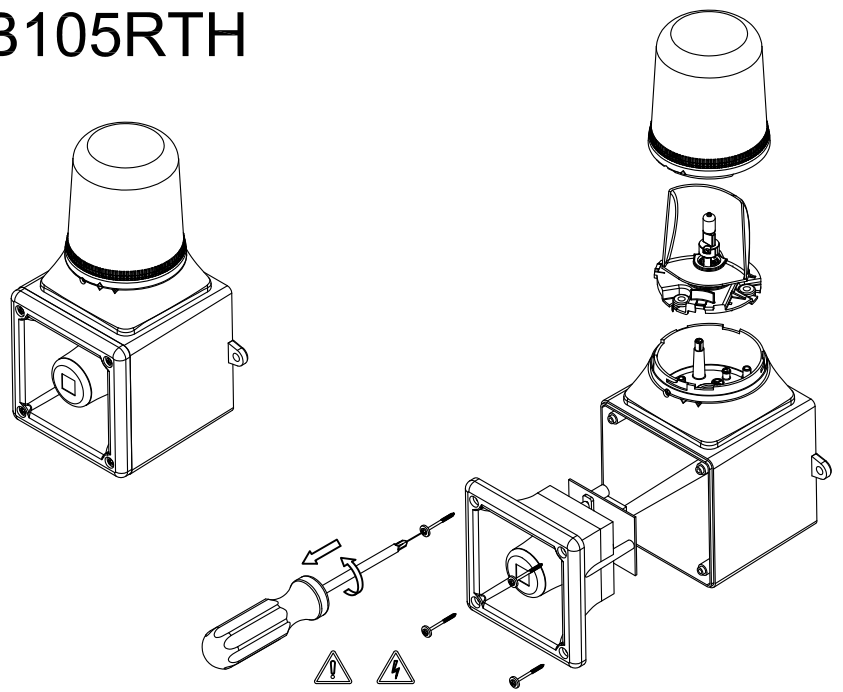

Dimensions in mm

Tel : +44(0)20 8743 8880 Fax : +44(0)2 8740 4200
 mail : sales@e2s.com web : www.e2s.com



D118-00-175-IS_SHT2_ISSUE_A