

KEEP A SHARPEYE
ON YOUR SAFETY



FS-1300 FLAME SIMULATOR

FOR ALL SPECTREX SINGLE IR
FLAME DETECTORS

*Providing foolproof, full loop testing
of your flame detection system in
Zones 1 and 2 hazardous areas at up
to 10ft (3m) testing distance*



BECAUSE YOU NEED TO BE ABSOLUTELY SURE!

To be fully secure against fire, flame detector self-testing is not enough. According to most local jurisdictional authorities and as required for SIL2 compliance, you need to test and ensure the integrity of your entire flame detection system at least once per year. That means performing a full system loop test from the detector, through the wiring to the controller, and up to the actual alarm notification. The only way to do so, without lighting a real fire, is with an external flame simulator.

Complete End-to-End Testing Using our Flame Simulator

The FS-1300 FLAME SIMULATOR is the essential complimentary tool to the self-testing capabilities of your Sharpeye™ Single IR Flame Detectors. It brings fire prevention safety to a higher level by giving you the ability to fully test the operational readiness of your entire fire detection system:

- **Test the integrity of all the system components:** all alarm outputs, all cabling and connections and the fire alarm panel functionality.
- **Test clear line of sight:** By using the Spectrex Flame Simulator, you will ensure that no object is obstructing the field of view, and that the detector's window lens is not obscured.

Therefore, by simulating a fire that actually triggers the detector outputs, the model FS-1300 verifies the correct operation of the Single IR flame detector, performs an essential end-to-end loop test and verifies window cleanliness.


The robust and reliable FS-1300 FLAME SIMULATOR allows remote testing of flame detectors, which are often located in difficult to access and/or classified hazardous areas (Zones 1 and 2).

Key Benefits

- Long-range flame detector activation – at a range up to 10ft (3m) – a 33% increase compared to previous simulator models.
- Reduced maintenance costs with easy access for testing detectors, in hard to reach places, from floor/deck level without the need for scaffolding or ladders
- Highly portable – for hand held operation by a single operator
- Easy aiming using laser diode
- ATEX/IECEx approved for use in Zones 1 and 2 hazardous areas
- Single charge is sufficient to test up to 100 detectors


FS-1300 Flame Simulator at Work

The Spectrex flame simulator emits IR radiation in a unique pattern corresponding to, and recognizable as fire by your SharpEye Flame Detector. This allows the detector to be tested under “real” fire conditions without the associated risks of an open flame.

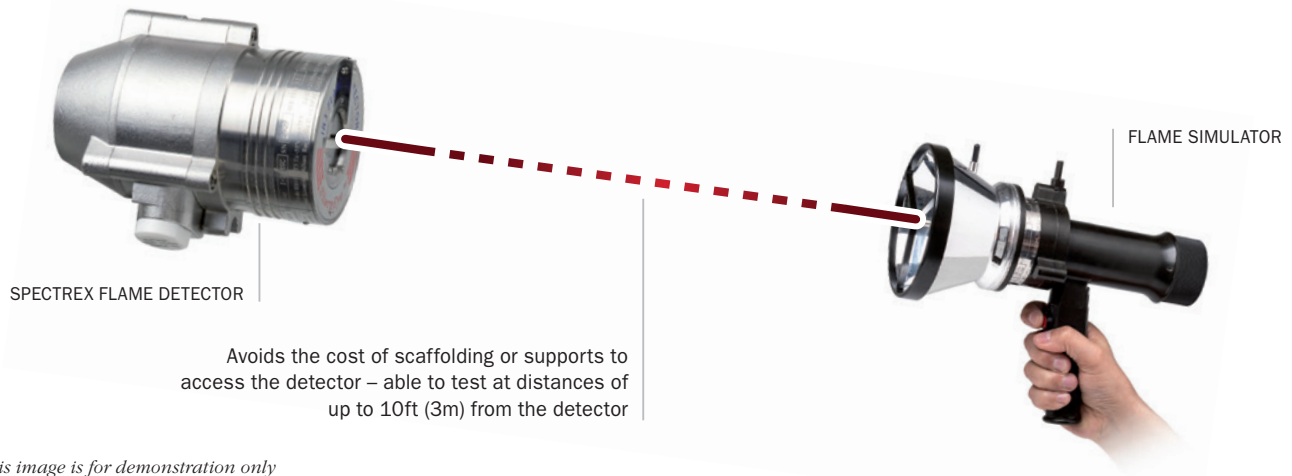

ABOUT **SharpEye**™

The SharpEye range of Optical Flame Detectors includes a wide variety of technologies such as IR3, Multi-IR, UV/IR, all providing reliability, performance and durability. These flame detectors are equipped with a range of output options, ensuring maximum compatibility, and a wide range of approvals to ensure suitability for a variety of industries, from high risk to commercial.

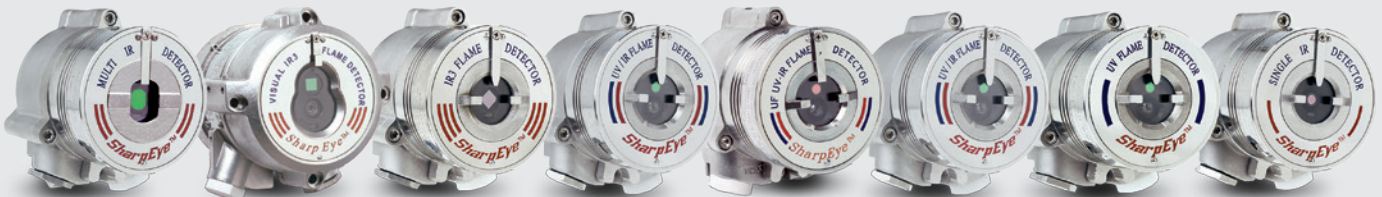

Technical Specifications

The Flame Simulator Kit, Part No. 380114-3 includes the FS-1300 Flame Simulator, battery, charger, tool kit and user guide TM380102 in carrying case.

SIMULATOR MODELS

Detector Types	Detector Sensitivity Setting	Min. Testing Distance	Max. Testing Distance
40/40R, 20/20R	50ft (15m)	2.5ft (0.75m)	10ft (3m)

GENERAL SPECIFICATIONS

Temperature range	-4°F to +122°F (-20°C to +50°C)
Vibration protection	1g (10-50Hz)
Activations between charges	100 max.

ELECTRICAL SPECIFICATIONS

Power	14.8V (4 x 3.7V rechargeable lithium-ion battery)
Maximum current	4A
Battery capacity	2.2AH
Charging time	2hr at 2A

MECHANICAL SPECIFICATIONS

Dimensions	9 x 7.3 x 5.35" (230 x 185 x 136 mm)
Weight	5.5 lb (2.5 kg)
Enclosure	Aluminum, heavy-duty copper-free, black zinc coating
Explosion-proof enclosure	ATEX and IECEx approved Ex II 2 G D Ex d ib op is IIB + H2 T5 Gb -20°C to +50°C (-4°F to +122°F)
Water and dust tight	IP65

Specifications subject to change

For more information view manual or website www.spectrex.net



Headquarters:

218 Little Falls Road
Cedar Grove, NJ 07009,
USA

Tel: +1 (973) 239 8398
Fax: +1 (973) 239 7614

spectrex@spectrex.net
www.spectrex.net

YOUR LOCAL SPECTREX OFFICE:

Texas (USA)

Mr. Jay Cooley,
Regional Sales Manager

16203 Park Row, Suite 150
Houston, Texas 77084,
USA

Tel: +1 (832) 321 5229
jay@spectrex.net

Europe

Mr. Ian Buchanan,
Regional Manager

6 Applecross Road
Glasgow G66 3TJ,
United Kingdom

Tel: +44 (0) 141 578 0693
ian@spectrex.net

Asia

Mr. Deryk Walker,
Regional Sales Manager

59 Fen Ji Hu, Danshui
Taipei County 25163, Taiwan (ROC)

Tel: +886 2 8626 2893
Cel: +886 926 664 232
deryk@spectrex.net